

LE以勒

PRODUCT BROCHURE

CREDIBLE • CREATIVE • PROFESSIONAL • WIN-WIN



Coffee

LE307A Bean to Cup Super Automatic Coffee Machine





Coffee Machine Parameter

● Model No.	LE307A
● Machine Size	H1000(mm)xW438 (mm)x D540 (mm) (Height includes the coffee bean house)
● Base Cabinet(Optional) Size	H790(mm)xW435(mm)xD435(mm)
● Net Weight	52 kg
● Display Screen	17-inch touch screen
● Rated Voltage	AC220-240V, 50~60Hz or AC 110~120V/60Hz;Rated power: 1550w, Standby power: 80w
● Communication Interface	Three Rs232 Serial port, Four USB2.0Host, One HDMI 2.0
● Operation System	Android 7.1
● Internet Supported	3G,4G Sim card, WIFI, Ethernet port
● Payment Type	Mobile QR code
● Management System	PC terminal + Mobile terminal PTZ management
● Detection Function	Alert when out of water or out of coffee beans
● Water Supply Mode	By water pump, Bottled purified water(19L*1 bottle)
● Built-in Water Tank Capacity	1.5L
● Canisters Capacity	One coffee bean house, 1.5 KG each; Three canisters for instant powder, 1KG each
● Dry Waste Box Capacity	2.5L
● Waste Water Tank Capacity	2L
● Application Environment	Relative Humidity ≤ 90%RH,Environment Temperature: 4-38'c, Altitude≤1000m
● Extraction Method	Pumping Pressure
● Heating Method	Boiler heating
● Advertising Video	Supported



LE307B Bean To Cup Super Automatic Coffee Machine





Coffee Machine Parameter

● Model No.	LE307B-2
● Machine Size	H1000(mm)xW438 (mm)x D540 (mm) (Height includes the coffee bean house)
● Base Cabinet(Optional) Size	H790(mm)xW435(mm)xD435(mm)
● Net Weight	52 Kg
● Display Screen	7-inch touch screen
● Rated Voltage	AC220-240V, 50~60Hz or AC 110~120V/60Hz;Rated power: 1600w, Standby power: 80w
● Communication Interface	Three Rs232 Serial port, Four USB2.0Host, One HDMI 2.0
● Operation System	Android 7.1
● Internet Supported	3G,4G Sim card, WIFI, Ethernet port
● Payment Type	Mobile QR code
● Management System	PC terminal + Mobile terminal PTZ management
● Detection Function	Alert when out of water or out of coffee beans
● Water Supply Mode	By water pump, Bottled purified water(19L*1bottle)
● Built-in Water Tank Capacity	1.5L
● Canisters Capacity	One coffee bean house, 1.5 KG each; Three canisters for instant powder, 1KG each
● Dry Waste Box Capacity	2.5L
● Waste Water Tank Capacity	2L
● Application Environment	Relative Humidity \leq 90%RH,Environment Temperature: 4-38°C, Altitude \leq 1000m
● Extraction Method	Pumping Pressure
● Heating Method	Boiler heating
● Advertising Video	Supported



LE308B Bean to Cup Super Automatic Coffee Vending Machine





Coffee Machine Parameter

● Model No.	LE308B
● Machine Size	H1930(mm)xD560(mm)xW665(mm)
● Net Weight	135 kg
● Rated Voltage	AC220-240V, 50Hz Or AC 110~120V/60Hz; Rated power: 1550w, Standby power: 80w
● Display Screen	21.5inches, Multi-finger touch (10 finger), RGB full color, Resolution: 1920*1080MAX
● Communication Interface	Three RS232 Serial port ,Four USB2.0 Host, One HDMI 2.0
● Operation System	Android 7.1
● Internet Supported	3G,4G Sim card, WIFI, Ethernet port
● Payment Type	Cash,Mobile QR code,Bank card,Prepaid card,Barcode scanner,Etc
● Water Supply Mode	By water pump, Bottled purified water(19L*2bottles)
● Cup capacity	350pcs, Cup size ø70,7ounce
● Management System	PC terminal + Mobile terminal PTZ management
● Stirring Stick Capacity	200pcs
● Built-in Water Tank Capacity	1.5L
● Coffee Bean House Capacity	One coffee bean house: 6L (About 2Kg); 5 canisters, 4L each (About 1.5Kg)
● Detection Function	Alert when out of water, Cups or beans
● Cup Door	Open automatically after drinks ready
● Waste Water Tank Capacity	12L
● Door Lock	Mechanical Lock
● Advertising Video	Yes
● Application Environment	Relative Humidity ≤ 90%RH, Environment Temperature: 4-38°C, Altitude≤1000m



LE308E Bean to Cup Super Automatic Coffee Vending Machine






Coffee Machine Parameter

● Model No.	LE308E
● Machine Size	H1930(mm)xW700 (mm)x D890 (mm) (Including Bar Table)
● Net Weight	≈180Kg,(Including water chiller)
● Rated Voltage	AC220-240V, 50Hz or AC 110~120V/60Hz;Rated power: 2250w, Standby power: 80w
● Display Screen	21.5inches, Multi-finger touch (10 finger), RGB full color, Resolution: 1920*1080MAX
● Communication Interface	Three Rs232 Serial port, Four USB 2.0Host, One HDMI 2.0
● Operation System	Android 7.1
● Internet Supported	3G,4G Sim card, WIFI, Ethernet port
● Payment Type	Cash,Mobile QR code,Bank card,Prepaid card,Barcode scanner,Etc
● Water Supply Mode	By water pump, Bottled purified water(19L*3bottles)
● Cup Capacity	150pcs, Cup size ø90,12ounce
● Cup lid Capacity	100pcs
● Built-in Water Tank Capacity	1.5L
● Canister Capacity	One coffee bean house, 2KG each: Five canisters, 1.5 KG each
● Detection Function	Alert when out of water, Cups
● Management System	PC terminal + Mobile terminal PTZ management
● Dry Waste Tank Capacity	15L
● Waste Water Tank Capacity	12L
● Door Lock	Mechanical Lock
● Cup Door	Open automatically after drinks ready
● Cup lid Door	Slide up and down manually
● Sterilization system	UV lamp for water
● Application Environment	Relative Humidity ≤ 90%RH,Environment Temperature: 4-38°C, Altitude≤1000m
● Advetising video	Yes
● AD Light lamp	Yes

LE308E Water Chiller Parameter

● Machine Size	H650(mm)xW266(mm)x D300 (mm)
● Net Weight	≈20Kg
● Rated Voltage	AC220-240V/50-60Hz or AC110-120V/60Hz, Rated Power 400w, Standby power 10w
● Cooling Method	By compressor
● Outlet Water Volume	≈10ml/s
● Cooling Temperature	Inlet water 25°C and outlet water 4°C, inlet water 40°C and outlet water 8°C
● Measuring Method	Flow meter
● Releasing Volume/Time	Min≥10ml, Max≤500ml
● Refrigerant	R404
● Function Detection	Water Outlet volume detection, Water outlet temperature detection, Cooling temperature detector
● Application Environment	Relative Humidity ≤ 90%RH, Environment Temperature: 4-38°C, Altitude≤1000m

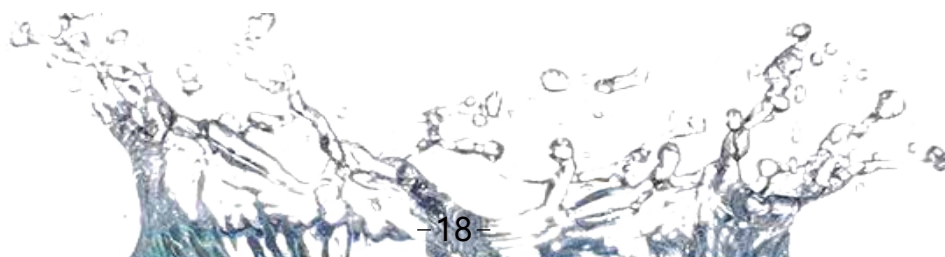

LE308G Hot / Cubic Ice Automatic Bean to Cup Coffee Vending Machine





Coffee Machine Parameter

● Model No.	LE308G
● Machine Size	H1930(mm)xW900(mm)x D890(mm) (Including Bar Table)
● Net Weight	≈225Kg,(Including ice maker)
● Rated Voltage	AC220-240V, 50-60Hz or AC 110~120V/60Hz;Rated power: 2250w, Standby power: 80w
● Display Screen	32inches, Multi-finger touch (10 finger), RGB full color, Resolution: 1920*1080MAX
● Communication Interface	Three RS232 Serial port ,Four USB2.0 Host, One HDMI 2.0
● Operation System	Android 7.1
● Internet Supported	3G,4G Sim card, WIFI, Ethernet port
● Payment Type	Cash,Mobile QR code,bank card,Prepaid card,Barcode scanner,Etc
● Water Supply Mode	By water pump, Bottled purified water(19L*3bottles)
● Management System	PC terminal + Mobile terminal PTZ management
● Cup and Cup lid Capacity	Cup size 12 ounce, 150pcs cups, 100pcs cup lids
● Built-in Water Tank Capacity	1.5L
● Canister Capacity	One coffee bean house: 6L (About 2kg); 5 canisters, 4L each (About 1.5kg)
● Detection Function	Alert when out of water, Cups, beans or ice
● Dry Waste Tank Capacity	15L
● Waste Water Tank Capacity	12L
● Door Lock	Mechanical Lock
● Cup Door	Open automatically after drinks ready
● Cup Lid Door	Slide up and down manually
● Sterilization System	Time-controlled UV lamp for air, UV lamp for water
● Application Environment	Relative Humidity ≤ 90%RH, Environment Temperature: 4-38'c, Altitude≤1000m
● Advertising Video	Yes
● AD Light Lamp	Yes

LE308G Ice Maker Specification

● Machine Size	H1050(mm)xW295(mm)x D640 (mm)
● Net Weight	≈60Kg
● Rated Voltage	AC220-240V/50Hz or AC110-120V/60Hz, Rated Power 650w, Standby power 20w
● Water Tank Capctiy	1.5L
● Ice Storing Capacity	≈3.5Kg
● Ice Making Time	Water temperature around 25°C<150mins, Water temperature around 40°C<240mins
● Measuring Method	By Weighing sensor and motor
● Releasing Volume/Time	30g≤ice volume≤200g
● Refrigerant	R404
● Function Detection	Water shortage, Ice full Detection, Ice release timeout detection, Gear motor detection
● Application Environment	Relative Humidity ≤ 90%RH, Environment Temperature: 4-38°C, Altitude≤1000m




LE100 Fully Automatic Ice Maker



Size	720(H)x610(W)x 450(D)mm
Net weight	59 kg
Power specification	200~230V, 50HZ/60Hz
Rated Power	400W/standby 20W
Ice Storage	3.5 kg
Control Mode	Button
Water tank capacity	1L
Cooling type	Air cooling
Water supply mode	Output ice
Function	Automatic Cubic Ice dispensing
Ice-making capacity	100kg/24h

Notes:

1. Ice-making capacity test requirements : Environment temperature 15°C, water temperature 10°C.
2. 220V / 60Hz (Customized)

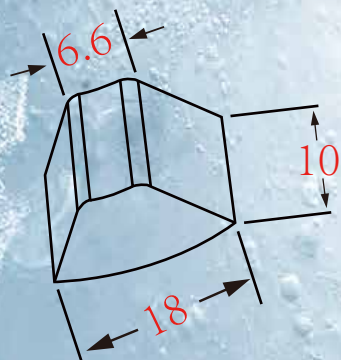


Ice Cube Characters:

-20 °C ore type ice, large contact area with drinks which enables rapid cooling and better taste. This ice maker is suitable to be used at milk tea stores, coffee shops, Chinese and Western restaurants, fast food chains, hotels, convenience stores, canteens, Internet cafes, etc



Main Feature:

- 1.Unique design with compact size; perfectly combining metal cabinet with plastic parts; luxurious, elegant and generous.
- 2.Fully automatically making cubic ice, dispensing ice at specified volume by simply pressing one button
- 3.Hygienic and healthy; Fully automatic ice making and dispensing function eliminates the possibility of contamination during manually ice pick-up.
- 4.Continuous ice making enables high efficiency, reducing the power consumption, as well as saving water.
- 4 Fully enclosed ice storage bucket with maximum storing capacity 3.5kg
- 5 Large ice-making capacity enables its wide application at cafes, bars, offices, KTVs, etc.
- 6 Flexible water supply; Tap water and bucket water both are supported.

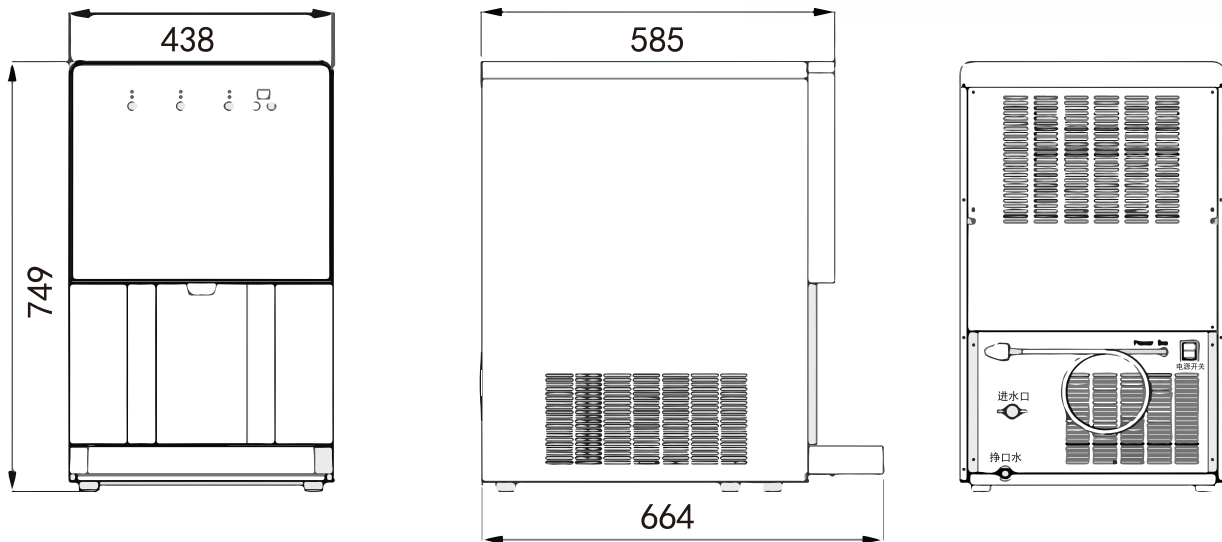

Ice Making Conditions:

Environment Temperature:5~38°C; Input water temperature:5~35°C; Inlet water pressure:0.15Mpa~0.55Mpa.

Installation Requirements: The distance between the wall and top of the machine or any side of the machine should be no less than 20CM, and the rear should be no less than 15CM.



LE205B Automatic Refrigerated Vending Machine



Vending Machine Parameter



● Model No.	LE205B
● Machine Size(mm)	H2007(mm)xW1080(mm)x D870(mm)
● Net Weight	≈300Kg
● PC&Touch Screen	PC with 10.1 inches touch screen
● Rated Voltage	AC220-240V, 50Hz or AC 110~120V/60Hz; Rated power 450W, Standby power 50w
● Communication Interface	Three Rs232 Serial port, Two USB2.0Host, One HDMI 2.0
● Payment Supported	Cash,Mobile QR code,Bank card,Prepaid card,Barcode scanner,Etc
● Application	Indoor
● Operation System	Android 7.1
● Management System	PC terminal + Mobile terminal PTZ management
● Advertising Video	Supported
● Goods Capacity	6 layers, Max. 60 types, All beverages 300pcs
● Delivery Method	Spring type
● Target Goods	Beverages, Snacks, Combo
● Temperature Range	4~25°C(Adjustable)
● Cooling Method	By Compressor
● Refrigerant	R134a
● Delivery Method	Gavalized steel and color plate, filled with Insulation board
● Door Material	Double tempered glass, Gavalized steel and color plate with Aluminum frame



LE209C Hot/Cold Bean to Cup Coffee Vending Machine and Snack / Drink Vending Machine





The Whole Machine Parameter

● Model No.	LE209C
● Machine Size	H1930(mm)xD900(mm)xW1460(mm)
● Net Weight	≈385kg(including water chiller)
● Rated Voltage	AC220-240V, 50-60Hz Or AC 110~120V/60Hz; Rated power:2250w, Standby power: 80w
● Display Screen	21.5inches, Multi-finger touch (10 finger), RGB full color, Resolution: 1920*1080MAX
● Communication Interface	Three Rs232 Serial port, Four USB2.0Host, One Ethernet port
● Operation System	Android 7.1
● Internet Supported	3G,4G Sim card, WIFI, Ethernet port
● Payment Type	Cash,Mobile QR code,Bank card,Prepaid card,Barcode scanner, Etc
● Door Lock	Mechanical Lock
● Water Supply Mode	By water pump, Bottled purified water(19L*2bottles)
● Cup capacity	150pcs, Cup size ø90,12ounce
● Cup lid Capacity	100pcs
● Built-in Water Tank Capacity	1.5L
● Coffee Bean House Capacity	One coffee bean house: 6L (About 2Kg); 5 canisters, 4L each (About 1.5Kg)
● Management System	PC terminal + Mobile terminal PTZ management
● Detection Function	Alert when out of water, Cups or beans
● Dry Waste Capacity	15L
● Waste Water Tank Capacity	12L
● Cup Door	Open automatically after drinks ready
● Cup lid Door	Slide up and down manually
● Sterilization System	Time-controlled UV lamp for air, UV lamp for water
● Application Environment	Relative Humidity ≤ 90%RH,Environment Temperature: 4-38°C, Altitude≤1000m
● Advetising video	Yes
● AD Light lamp	Yes

LE209C Water Chiller Parameter

● Machine Size	H650(mm)xD266(mm)xW300(mm)
● Net Weight	≈20Kg
● Rated Voltage	AC220-240V, 50Hz Or AC 110~120V/60Hz; Rated power:400w, Standby power:10w
● Cooling Method	By compressor
● Outlet Water Volume	≈10ml/s
● Cooling Temperature	Water Outlet volume detection, Water outlet temperature detection, Cooling temperature detection
● Measuring Method	Flow meter
● Releasing Volume/Time	Min>10ml, Max≤500ml
● Refrigerant	R404
● Function Detection	Water Outlet volume detection, Water outlet temperature detection, Cooling temperature detection
● Application Environment	Relative Humidity ≤ 90%RH, Environment Temperature: 4-38°C, Altitude≤1000m

Snacks Machine Parameter

Max Good Size (mm)		Single Cargo Road				Double Cargo Road			
		4Slot	5Slot	8Slot	12Slot	4Slot	5Slot	8Slot	12Slot
L		105	85	55	37	105	85	55	37
W		75				150			
H		Height adjustable							
Goods Capacity		6 Layers x Slot quantity x Cargo Road quantity(Customization available)							
Rated Voltage		220V/50Hz or 110V/60Hz							
Power Rate		Working mode:350W,Standby mode:50W,Daily power consumption: 6kWh							



图例：24H无人店







以勒



Hangzhou Yile Shangyun Robot Technology Co., Ltd.

Address: No. 100 Changda Road, Hangzhou Yuhang Economic
Development Zone, Linping District, Hangzhou, China

Website: www.ylvending.com

Tel: +86 (0)571 88745178/88748955

Email: USA Office: yileusofficial@ylvending.com

HQ: inquiry@ylvending.com